


Vecoplan Cross Stream Separator VQS 1000 *patent pending*


For the separation of low density fraction out of pre-shred production waste, mixed construction waste, plastic waste from the pulper as well as municipal and industrial waste. The final product is a high calorific fuel which can be re-shred and pelletised.



Installation on a standard demountable body, semi-mobile

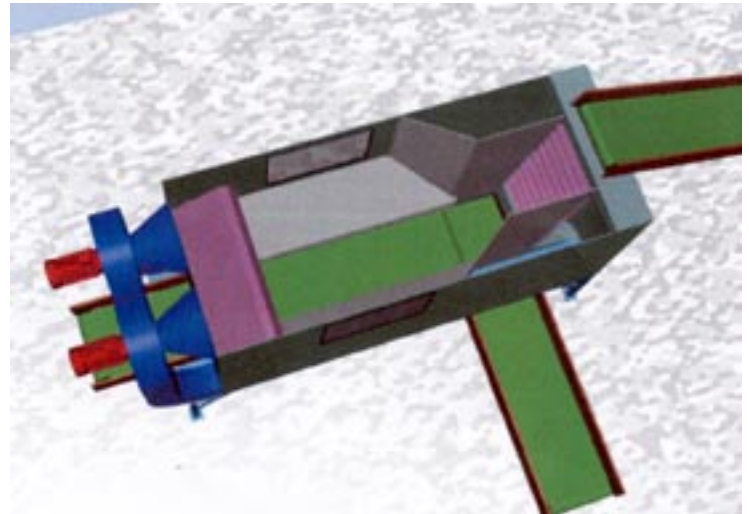

Main Dimensions: (l x w x h):	7,300 x 2,500 x 2,800
Fan Motors:	2 x 30 kW
Air Flow:	2 x 20,000 m ³ /h
Conveyor Motor:	2,2 kW
Air Amount to be Cleared:	4,000 m ³ /h

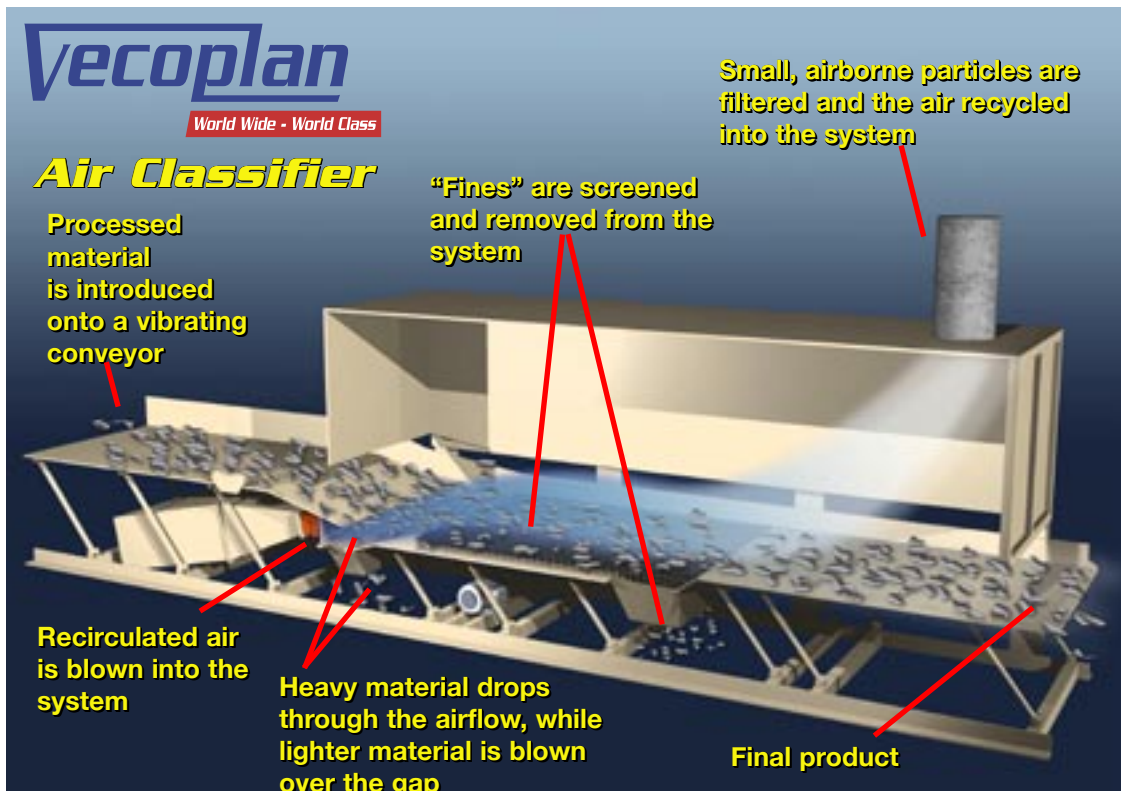

- Voltage: 400/3/50, 125 A
- Exhaust: approx. 4,000 m³/h
- For stationary installations we recommend mounting a filter unit above the cross-stream-separator

Vecoplan, LLC

P.O. Box 7224 • High Point, North Carolina, 27264
 Phone: (336) 861-6070 • Fax: (336) 861-4329
www.VecoplanLLC.com